


**T.D.TAICHEE**  
**TX-616**



Engineering Information	技术参数	TX-616
Drivers	单元组成	LF:1 × 15" Voice-coil:3" / HF:1 × 1.4" Voice-coil:3"
Frequency(+/-3dB)	频率响应(+/-3dB)	40-18000Hz
Dispersion(-6dB)	覆盖角度(-6dB)	80° × 50°
Sensitivity(1m/1W)	灵敏度 (1m/1W)	100dB
maximum SPL	输出声压级	127dB continuous/133dB peak
Nominal Impedance	额定阻抗	8 Ohms
Rated Power	功率	500W AES / 2000W peak
Recommended AMP	推荐放大器功率	750W/8 Ohms
Crossover Frequency	分频点	1500Hz
Connectors	输入连接器	2 × Speakon NL4MP
Dimensions(H × W × D)	净尺寸(H × W × D)	690mm × (443,270)mm × 490mm
Packing Dimensions(H × W × D)	包装尺寸(H × W × D)	762mm × 589mm × 541mm
Net Weight(KG)	净重量 (KG)	40.5
Gross Weight(KG)	包装总重量 (KG)	43
<b>Construction</b>	<b>结构特点</b>	
Physical	箱体外形	梯形
Enclosure Material	箱体材料	桦木夹板
Enclosure Material	箱体面网	模压钢制圆形孔网面, 外加黑色海绵
Finish	表面漆	紫色环保水性耐磨油漆涂装 (可按客户要求定制颜色)
Handing Position	吊装点	17个M10螺丝吊装孔位
Pole Mount	支撑座	底部 φ 35毫米支撑座
Caster	运输轮	
Applications	适用范围	礼堂, 会议室, 音乐酒吧, DISCO酒吧, KTV房间
<b>Construction Drawing</b>	<b>结构示意图</b>	

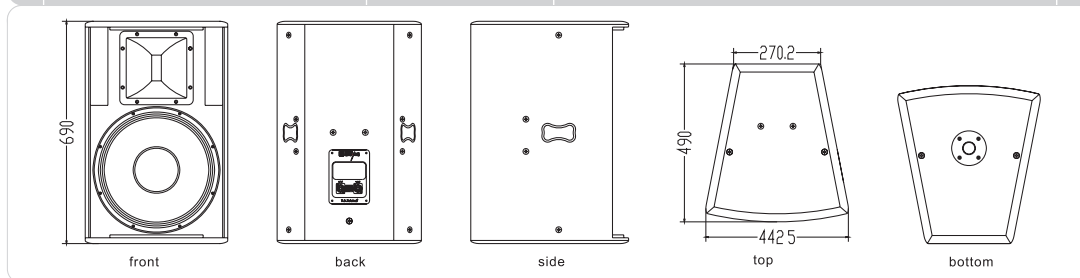

T.D. TAICHEE Professional Audio System